Specification\_RHPC\_v23

# YARDMASTER® PROGRESSIVE CAVITY PUMP

- Pressure: Up to 240m Head
- Volume: Up to 55m<sup>3</sup>/hr
- Temperature Range: -10 to 100 degrees C
- Suction Lift: Up to 8.5m
- 4kW 30kW Power options
- Six rotor speed options for each model
- Construction: Cast iron, Chrome plated rotor and Natural rubber stator
- Assembled & tested in NZ

#### **Benefits**

- Shore Mounted Solution Maintenance made safe
- Constant Flow Easy to apply to any system
- Power Efficient Lower running costs

#### Ideal for...

'Processed' Irrigation Green water / small solids

### **Applications & Case Studies**



Specifications are subject to change without notice



Distributed in Australia by: Dairy Pumping Systems Aust Pty Ltd 6 Ashenden Street, Leongatha, Victoria 3953, Australia Phone: 03 9739 6521 Email: info@dairypumpingsystems.com.au

tralia

www.dairypumpingsystems.com.au

#### 'New Product' Warranty: this product comes with a.. 2 Year Extended

Introductory

## Manufacturer's Warranty\*

\* Refer to Yardmaster® Standard Warranty Terms & Conditions


PROVIDING YOU ANOTHER CHOICE

Reid & Harrison<sup>®</sup> is pleased to announce the release of a range of progressive cavity pumps for dairy effluent, adding yet another pump option for your effluent system dependent on customer and application requirements.

We can now pump further and it's costing less to do s Waikato Farmer

ner

## YARDMASTER® PROGRESSIVE CAVITY PUMP PERFORMANCE CURVES

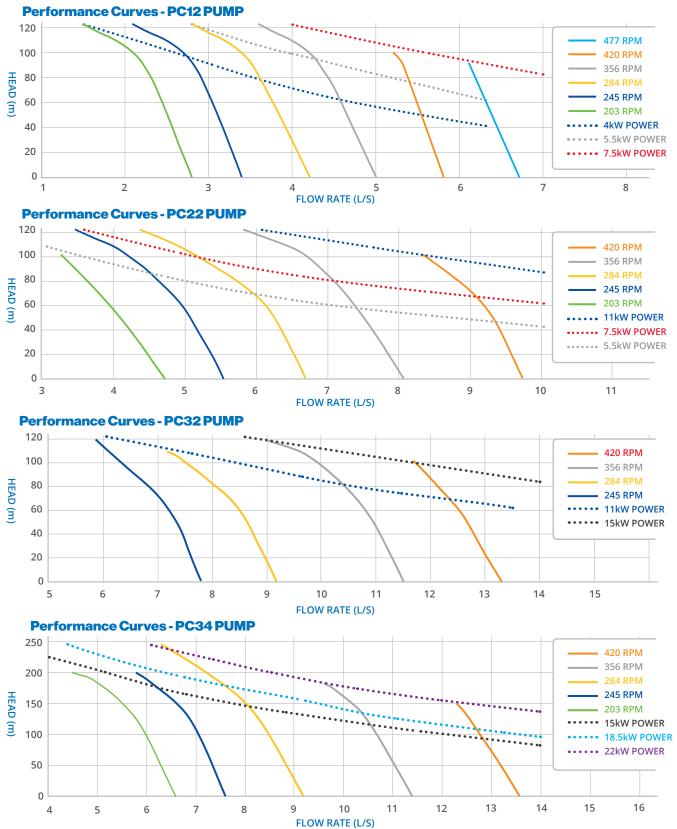

Due to continuous product development, Reid & Harrison reserve the right to change specification without notice. Performance figures are based on average test results from production pumps. Specific performance test curves can be supplied against order

# REID & HARRISON®

Distributed in Australia by: Dairy Pumping Systems Aust Pty Ltd 6 Ashenden Street, Leongatha, Victoria 3953, Australia Phone: 03 9739 6521 Email: info@dairypumpingsystems.com.au

www.dairypumpingsystems.com.au