


COMPONENTS & MATERIALS

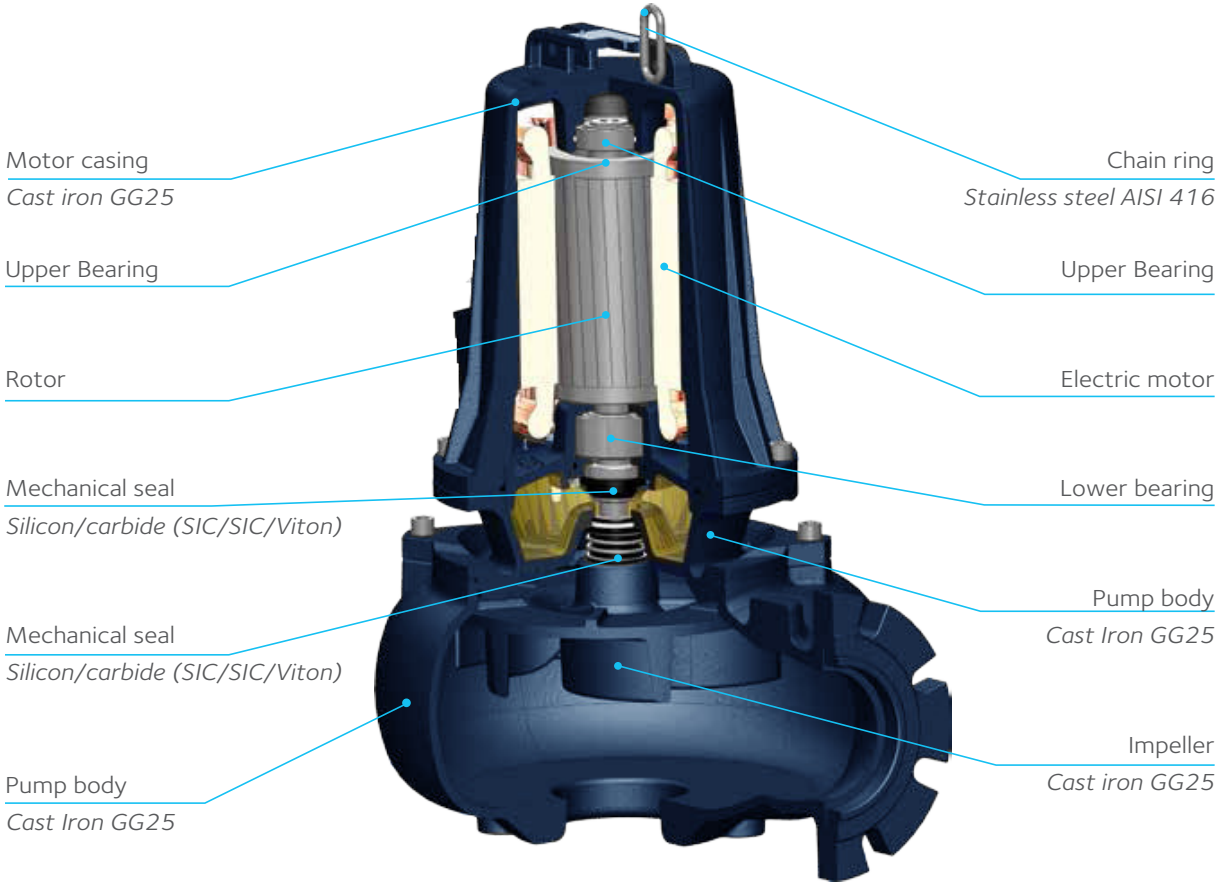

TECHNOLOGY & FEATURES

V-SERIES

Impeller

Recessed vortex impeller granting ample solids handling thus avoiding clogging problems

Seal Leak Detector

The seal leak detector is certified according to the norm ATEX through safety barrier EN 60079-0, EN 60079-1 and fitted standard on all series.

Cable Gland

The cable gland is made of stainless steel AISI 316 and certified according to the norm ATEX EN 60079-0, EN 60079-1. Standard on all series.

ALPHA-SERIES

Solids Handling

Excellent free passage for up to 50mm solids

Relay (Optional)

For the correct operation of a float switch

Seals

Two mechanical seals. Motor side: carbon/ceramic (CA/CE/Viton) Impeller side: Silicon carbide (SIC/SIC/Viton). Easily inspectionable oil chamber.

www.dairypumpingsystems.com.au

YARDMASTER® PRODUCT RANGE

EFFLUENT PUMPS

FOR 'PROCESSED' IRRIGATION

Multi-stage Vertical
IDEAL FOR
• Floating Frames
• High efficiency /pressure
• Green water /Small solids

Multi-stage Horizontal
IDEAL FOR
• Flood feed applications
• High efficiency /pressure
• Green water /Small solids

Self-Priming Multi-stage
IDEAL FOR
• Shore Mounting
• High efficiency /pressure
• Green water /Small solids

Horizontal Pump
IDEAL FOR
• Flood feed applications
• High speed irrigation pump
• Green water with solids

Vertical Pump
IDEAL FOR
• Floating Frames
• High speed irrigation pump
• Green water with solids

Extender Pump
IDEAL FOR
• Deep Sumps
• High speed pump
• Green water with solids

Horizontal Pump
IDEAL FOR
• Flood feed applications
• Transfer pump
• Green water with solids

Vertical Pump
IDEAL FOR
• Floating Frames
• Transfer pump
• Green water with solids

Extender Pump
IDEAL FOR
• Deep Sumps
• Transfer pump
• Green water with solids

Trough Pump
IDEAL FOR
• Emptying of troughs
• Water with solids

EFFLUENT PUMPS

FOR VOLUME TRANSFER

High Volume Pump
IDEAL FOR
• Volume transfer
• Green water with solids

Heavy Duty Pump
IDEAL FOR
• Volume transfer
• Liquid with solids
• Industrial applications

PTO Pump
IDEAL FOR
• Volume transfer
• Green water with solids

SUBMERSIBLE

Submersible Pump
IDEAL FOR
• Feeding mechanical separators
• Transfer pump
• Green water with solids

STIRRERS

FOR PONDS, SUMPS OR TANKS

Vertical Stirrer
IDEAL FOR
• Floating Frame mounting
• Smaller ponds or round tanks

Right Angle Stirrer
IDEAL FOR
• Floating Frame mounting
• Large ponds
• Strong agitation

Shore Mounted Stirrer
IDEAL FOR
• Shore Mounting
• Large ponds
• Safe access

SUBMERSIBLE

Submersible Stirrer
IDEAL FOR
• Small sumps or tanks
• Easy access when fitted with a Yardmaster lifting frame

SEPARATORS

Inclined Screw Separator (YS)
IDEAL FOR
• Entry level separator
• Easiest installation in existing effluent systems
• Handles most duties
• May be used as primary separator

Horizontal Screw Separator (HSS)
IDEAL FOR
• All effluent ponds
• Driest solids
• Can be used as a primary separator

Rotary Drum Separator (RDS)
IDEAL FOR
• Low power requirements
• Moderate dry solids
• Low wear & maintenance

Static Screen Separator (SS)
IDEAL FOR
• No power
• No moving parts
• Can be used as primary separator

EFFLUENT MANAGEMENT

Yardmaster HALO SUPERSMART Monitoring & Control
IDEAL FOR
• Flow control for varying applications
• Control of irrigation rates
• Control by cell phone
• Flow protection

ACCESSORIES

INCLUDING
• Floating Frames, Lifting Frames & Platforms
• Trough Pump
• In-line Cutter & Blades
• Automatic Greaser
• Float Control Switch
• Headworks
• Wash Down System
& MORE

YARDMASTER® SUBMERSIBLE PUMPS

V-SERIES

ALPHA SERIES

REID & HARRISON
Yardmaster®

Distributed in Australia by: Dairy Pumping Systems Aust Pty Ltd
6 Ashenden Street, Leongatha, Victoria 3953, Australia. Phone: 03 9739 6521
www.dairypumpingsystems.com.au



V SERIES

POWER	DISCHARGE
1.7-3kW	DN80 - DN100

Application

The V-Series of submersible pumps are ideal for feeding a Yardmaster separator or used as a transfer pump where a high solids loading is present.

Features

All main components are manufactured from grey cast iron. Two individual mechanical seals. One on the motor side in the oil chamber. The other on the impeller side in contact with the liquid. This along with high quality components, ensures trouble free functioning and reliability of the pump.

Motor Features

- Squirrel cage motor 2 & 4 poles
- Thermal protection T1 and T2 embedded in the motor winding (to be wired to the three pole contactor in the control panel)
- Class F insulation (155°C)
- IP 68 protection
- The motor is kept cool by the liquid in which it is submerged

Limits of Use

- Max. permissible liquid temperature: 40°C with pump fully submerged
- Maximum depth of immersion: 20 m
- Permissible pH value: 6-11
- Suitable for liquids with density <1,100 kg/m3
- Allowed voltage: 230/400V±5%
- Allowed frequency: 50Hz ±2%



ALPHA SERIES

POWER	DISCHARGE
0.28 - 2.2kW	G1”1/4 - G2”

Application

The Alpha series of submersible pumps are ideal for feeding a Yardmaster separator where a moderate solids loading is present along with a lower flow requirement. These pumps are also suitable as an underpass pump.

Features

All main components are manufactured from grey cast iron. Two individual mechanical seals. One on the motor side in the oil chamber. The other on the impeller side in contact with the liquid. This along with high quality components, ensures trouble free functioning and reliability of the pump.

Motor Features

- Squirrel cage motor 2 pole
- Thermal protection in the motor winding (only with RHAAlphaEVO60T and RHAAlphaPRO55T)
- Class F insulation (155°C)
- IP 68 protection
- The motor is kept cool by the liquid in which it is submerged

Limits of Use

- Max. permissible liquid temperature: 40°C with pump fully submerged
- Maximum depth of immersion: 20m
- Permissible pH value: 6-11
- Suitable for liquids with density <1,100 kg/m3
- Allowed voltage: 230/400V±5%
- Allowed frequency: 50Hz ±2%

SUBMERSIBLE SPECIFICATIONS

No	Pump	Delivery	Free Passage	kW		HP	RPM	A		Float Switch	Cables			Foot	Weight (kg)	Impleller
				P1	P2			1/min	3 Phase - 400V		1 Phase - 230V	Optional	Type			
1	RHV080152344	DN80 PN16	80mm	2.8	2.2	3	1450	5.2			H07RN8F	4x1.5+3x0.5 Ø15	10	RHP5	68	190
2	RHV080152345			3.8	3	4		7.2							69	207
4	RHV100152348			2.1	1.7	2.3		3.9							70	155
5	RHV100152349	DN100 PN16	100mm	2.8	2.2	3		5.2						RHP5	71	190
6	RHV100152350			3.8	3	4		7.2							74	207
7	RHAlphaC1M			"G 1""1/4"	30mm	0.33		0.28	0.4						1.9	✓
8	RHAlphaEVO2M	G 2"	35mm	0.77	0.56	0.75		4	✓	15.5		96				
9	RHAlphaEVO32M		40mm	0.95	0.75	1		5.2	✓	16.5		104				
10	RHAlphaEVO60T		50mm	2.6	2.2	3	2850	5.2		26		125				
11	RHAlphaEVO55MG		45mm	2.1	1.5	2		9.9	✓	4x1.5+2x0.5 Ø12		21	120			
12	RHAlphaEVO55T		2.1	1.5	2	3.6			4x1 Ø10	21		120				
13	RHAlphaPRO55T		50mm	1.8	1.5	2	3.7			4x1.5+2x0.5 Ø12		26	110			


No	Pump	I/s l/m m3/h	1 60 3.6	2 120 7.2	4 240 14.4	6 360 21.6	8 480 28.8	12 720 43.2	16 960 57.6	20 1200 72	24 1440 86.4	28 1680 100.8	32 1920 115.2
1	RHV080152344	Head (m)	10	9.5	9.2	8.5	8	6.8	5.5	4.5	3.2	2	
2	RHV080152345		12.5	12	11.5	10.5	10	8.8	7.5	6.2	4.8	3.5	2
4	RHV100152348		5.5	5.4	5	4.6	4.2	3.5	3	2.2			
5	RHV100152349		7.7	7.5	7	6.5	6	5	4.5	3.5	2.5		
6	RHV100152350		10	9.3	9	8.8	8.5	7	6	5	4	3	2
7	RHAlphaC1M		4.6	2.2	10								
8	RHAlphaEVO2M		8	6	2								
9	RHAlphaEVO32M		9.5	8.5	6.5	4.5	2						
10	RHAlphaEVO60T		16.5	15.5	13.5	11	8						
11	RHAlphaEVO55MG		13.5	12.5	10	7.5	4.2						
12	RHAlphaEVO55T		13.5	12.5	10	7.5	4.2						
13	RHAAlphaPRO55T		13.5	12.5	10.5	8	5.5						

Optional Accessories

Pump	Flanged Hose Connection
RHV080152	RHN2
RHV100152	RHN3
RHA100152	RHN3



The Foot Stand and Flanged Hose Connection (illustrated) are optional extras

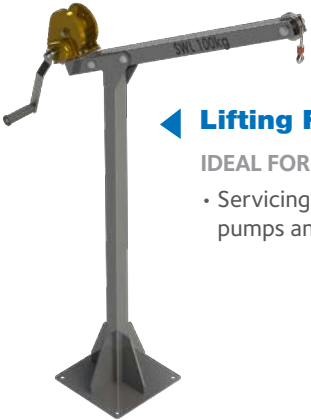


Lifting Frames

IDEAL FOR

- Servicing Submersible pumps and stirrers

Due to continuous product development, Reid & Harrison reserve the right to change specification without notice. Performance figures are based on average test results from production pumps. Specific performance test curves can be supplied against order

PERFORMANCE CURVES

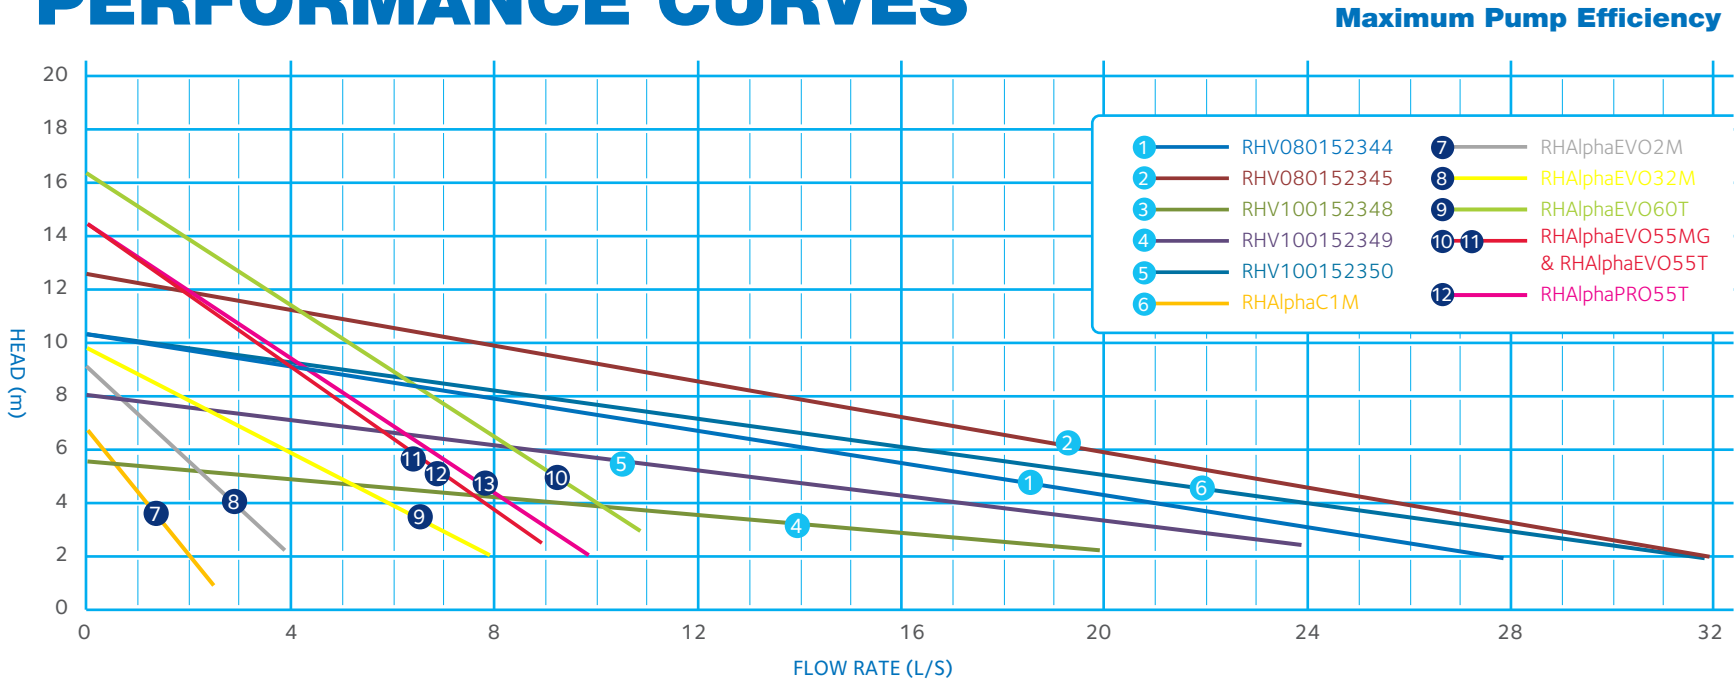

Distributed in Australia by:

Dairy Pumping Systems Aust Pty Ltd 6 Ashenden Street, Leongatha, Victoria 3953, Australia. Phone: 03 9739 6521

Email: info@dairypumpingsystems.com.au

www.dairypumpingsystems.com.au